



RETRACTABLE AWNINGS

For Technical Support visit us at <http://ownerscorner.sunsetter.com>  
or Call Toll Free 800-670-7071 • Fax 877-224-4944

## Instructions for Use of Breakaway Safety Clips for Awning Cover

**\* REQUIRED \***

### **WARNING**

#### SUDDEN IMPACT HAZARD

- **USE ONLY** provided **Breakaway Safety Clips** to fasten the Protective Cover around the Awning.
- **DO NOT USE** other tie-downs in addition to or instead of the provided Breakaway Safety Clips.
- **DO NOT** insert tie-downs through grommet holes on the Protective Cover.
- **NEVER** place a ladder or stand in front and at the level of the Front Bar of the Awning.

Failure to follow these instructions can present risk of **DEATH** or **SERIOUS INJURY** from being struck by an Awning suddenly opening while removing tie-downs.

**Parts Supplied:** Safety Clip, Cord Lock, Gear, and Cord. (**Safety Clip Kit**)


See **Figure 1** for parts identification and table below for number of parts.

Awning Size (ft)	8	10	11	12	13	14	15	16	17	18	19	20
Number of Safety Clip Kits	6	6	6	7	7	8	8	9	10	10	10	10

### Assembly of Breakaway Safety Clips

1. Thread a Cord through one of the Safety Clip handles. See **Figure 2**.
2. Slide the two ends of the Cord through the Cord Lock from the smaller (flat edge) side to the larger (curved) side. (Do not pull the entire Cord through.) See **Figure 3**.
3. Hold the Cord Lock in the center of the Cord and separate the two ends of the Cord. See **Figure 4**.
4. Slide the Gear into the large (curved) side of the Cord Lock until the Gear pops into place. Be sure that the part of the Gear that protrudes is aligned with the slot in the Cord Lock. See **Figure 5**.
5. Repeat with remaining Safety Clips, Cords, Gears, and Cord Locks.


**Figure 1 - Parts Supplied (Safety Clip Kit)**

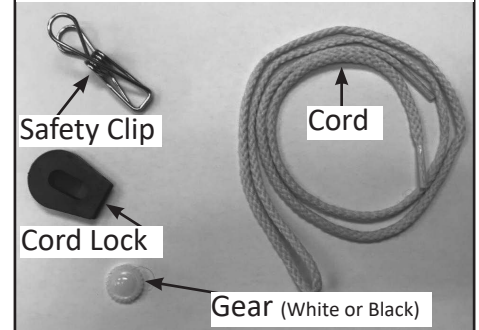


**Figure 2**



**Figure 3**

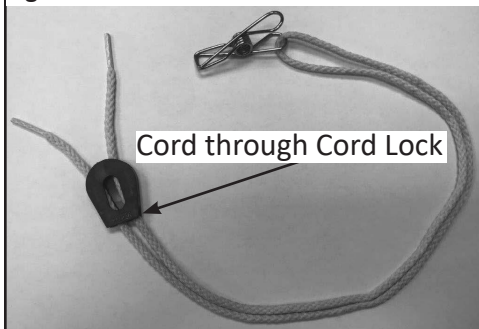

**Figure 4**

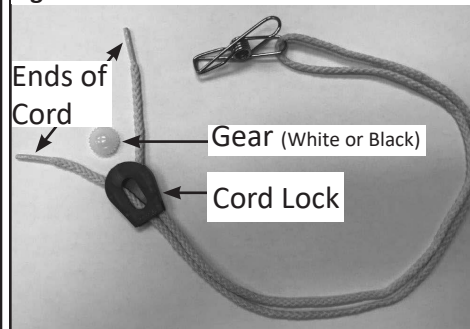

**Figure 5**



# ! WARNING






## SUDDEN IMPACT HAZARD

- **USE ONLY** provided **Breakaway Safety Clips** to fasten the Protective Cover around the Awning.
- **DO NOT USE** other tie-downs in addition to or instead of the provided Breakaway Safety Clips.
- **DO NOT** insert tie-downs through grommet holes on the Protective Cover.
- **NEVER** place a ladder or stand in front and at the level of the Front Bar of the Awning.

Failure to follow these instructions can present risk of **DEATH** or **SERIOUS INJURY** from being struck by an Awning suddenly opening while removing tie-downs.

## Installation and First Use of Breakaway Safety Clips

1. Close the Awning and unplug it from the electric outlet.
2. Secure the Breakaway Safety Clips around the Awning Square Bar as follows:
  - a. Pass the Safety Clip over the top of and down the back side of the Square Bar. See **Figure 6**.
  - b. Thread the Safety Clip through the loop in the Cord (between the Cord Lock and Square Bar). See **Figure 6**.
  - c. Attach the Safety Clip to the bottom edge of the Cover along the hem by each Grommet location. See **Figure 7**.
  - d. Cinch the Cord Lock towards the Square Bar until the Cover is snug. See **Figure 8**.
3. After cinching to the desired snugness, create a knot using the two Cord ends, so the knot is located approximately 1 inch from the Cord Lock. See **Figure 9**.
4. Trim the excess Cord close to the knot at each location. See **Figure 10**.
5. Call **800-670-7071** for Free replacement Cord Locks, if necessary.

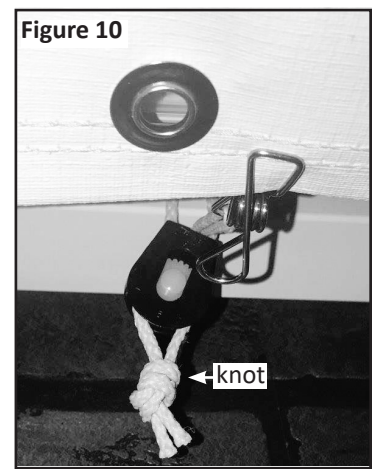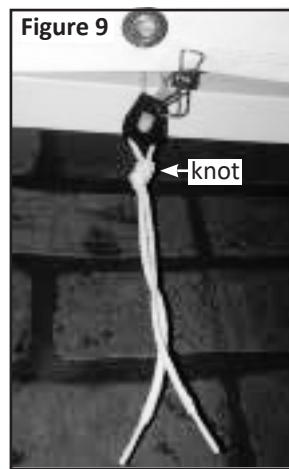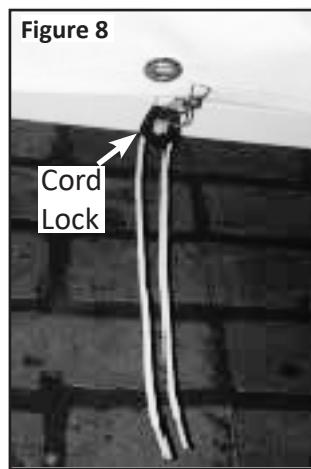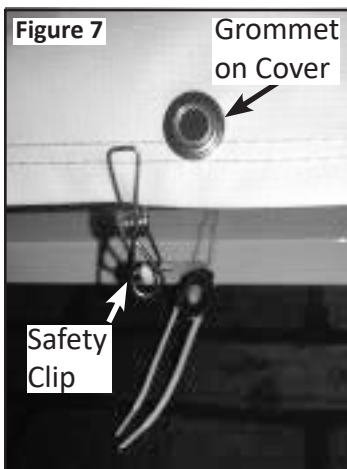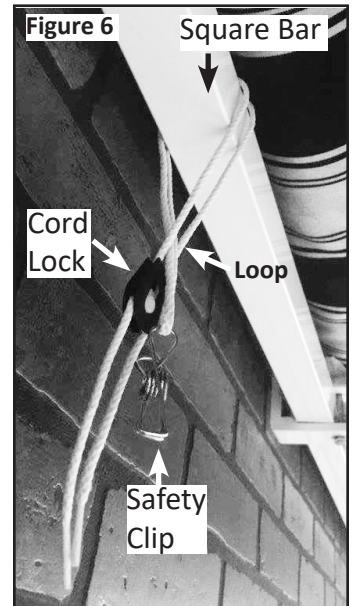

## Detaching Breakaway Safety Clips

1. Verify Awning is closed and unplugged.
2. Position yourself under the Awning and detach each Safety Clip, one at a time.
3. Stow each Safety Clip for future use by looping the Cord around the Square Bar and attaching the Clip to the Cord. **DO NOT REMOVE Cord from the Square Bar.**
4. Plug in the electrical cord to use the Awning.